

CLEAN MEMBRANES


C²-UF HB Standard Healthy Buildings System

The C²-UF system from Clean Membranes offers the world's most compact, packaged ultrafiltration (UF) water treatment technology.

The C²-UF HB system is specifically designed to eliminate **99.9999%** of *Legionella* bacteria and other pathogenic bacteria and viruses from the water supply **at the point of entry** to a building or facility.

The C²-UF HB system is appropriate for all senior living, nursing home, and hospital facilities where contamination of the water supply is a concern for vulnerable populations.

The C²-UF HB system is consistent with the *Legionella* risk management process for building water systems outlined in ASHRAE Standard 188.

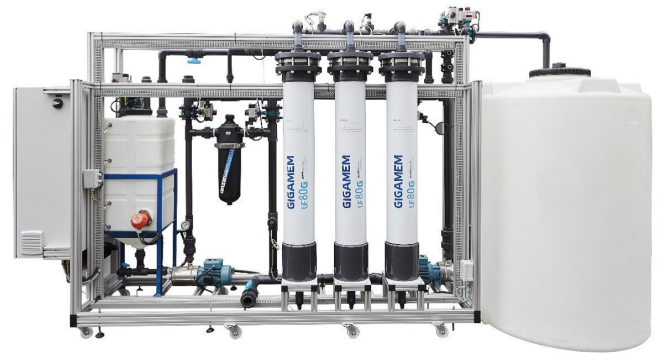

The C²-UF 30 HB system features three of Polymem's compact Gigamem® UF80G modules.


The data below illustrate the performance of the three module C²-UF 30 HB system. Systems containing 1 and 2 filtration modules for smaller system capacities are also available.

Max. Instantaneous Flow Rate	57 gpm*
Max. Daily Production	71,000 gallons*
Max. Inlet Pressure	58 psi
Max. Backwash Pressure	36.2 psi
Max. Filtration TMP	21.7 psi
Operating Temperature	32-104 °F
Cleaning pH	2-11
Feed Turbidity	0-100 NTU
Membrane Material	Neophil™ PVDF
Pore Size (nominal)	0.025 µm
Power Supply	230 VAC, 3-phase
Cleaning Chemicals	NaOCl, Acid, Base
Cleaning Frequency	Water Quality Dependent*

*Capacity and cleaning frequency may vary based on operating conditions. See operating manual for additional information.

Membrane Performance

Outlet Turbidity	< 0.1 NTU
Outlet SDI ₁₅	<< 3
Bacteria Reduction	> 6 log
Virus Reduction	> 3 log

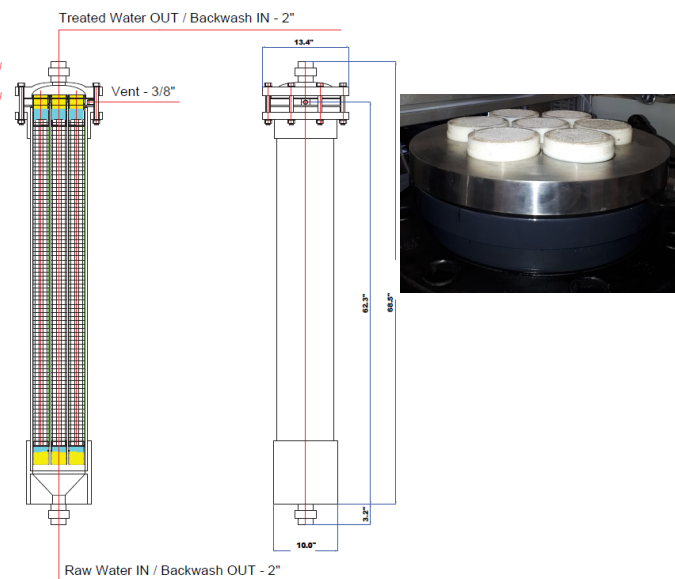

Each 9" OD Gigamem® UF80G modules is uniquely composed of **7 individually replaceable fiber bundles** for superior performance.

Contact Clean Membranes for more information.

©2018 Clean Membranes. All rights reserved. Rev 6.21.18